Meccano 70

TRACK_230V

rimani

	L	L1	H	H1
on/off	158mm	57mm	14mm	28mm
DOB*	158mm	57mm	14mm	28mm
DALI	265mm	120mm	14mm	28mm
BLE	258mm	91mm	17mm	28mm

* The DOB version features a dimmer that protrudes 12mm

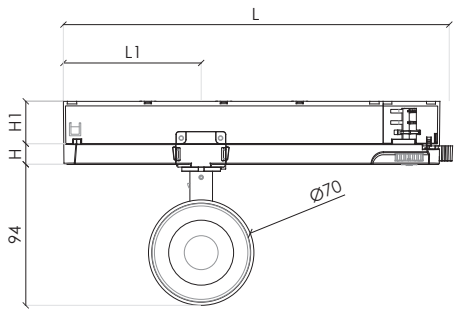



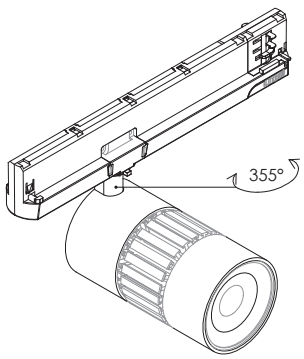

Flexibility of application three sizes with different powers

Adjustable light where needed

Controlled beam at 15°, 25°, 38°, 50°

Aluminium housing, ø 70mm e H 125mm, matt color painting white RAL 9010 or black RAL 9005 (other RALs on request), with adjustable bracket tiltable ±90° and rotatable through 355°, equipped with mono or 3-circuit track adapter.

Passive cooling thermal management

Correlate Color Temperature (CCT): 3000K

Colour Rendering Index: Ra-93@3000K

Chromaticy tolerance: SDCM<3@50.000h

Voltage: 230VAC

On-off control; fixture can be supplied with rotary intensity dimmer on the driver, DALI protocol, or wireless bluetooth (Casambi BLE) upon request

Nominal LED consumption: 12,1W

Total power consumption: 10W

LED luminous flux: 1100lm

Luminaire luminous flux: 702lm / 832lm / 803lm / 671lm

Optics: 15°, 25°, 38°, 50° (with diffuser filter)

L90B10 @50.000h

International Protection code: IP40

Insulation class: CL I

Energy class: A

Weight: 0,73Kg

IP40 RoHS COMPLIANT

TCC 3000K

Ra	Beam angle	Luminous flux (lm)
93	15°	702
93	25°	832
93	38°	803
93	50°	671

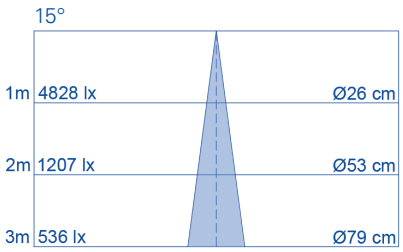

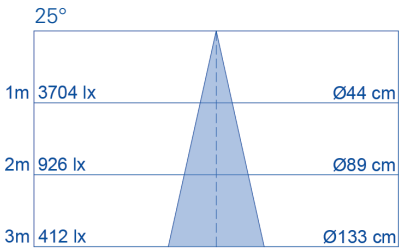

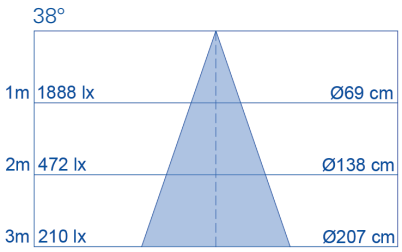

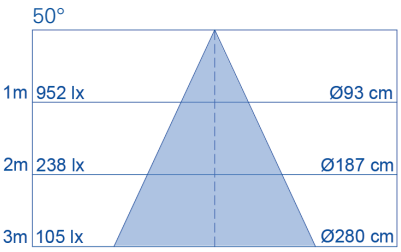

We reserve the right to make technical and design changes. Edition: 31.03.2026 @ Rimani - www.rimanisrl.it